

Product Format	Standard	Result
Gauge	ISO 24346 (EN 428)	2.0mm
Wear Layer	ISO 24340 (EN 429)	0.70mm
Total Weight	ISO 23997 (EN 430)	2660g/m²
Finish		PUR

Sheet Size	Size & Coverage per Roll	Shades
Sheet	2m x 20m = 40m²	44

Performance Requirements	Standard	Result
General Performance	ISO 10582 (EN 649) ASTM F1303	Conforms Type I, Grade I, Class B Backing
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 Appendix D ASTM D2047	Class D5 R10 R10 SCOF ≥0.5
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 649	Group T
Reaction to Fire	EN 13501-1 ASTM E648 AS ISO 9239.1 CAN/ULC S-102.2	Class Bfl-S1 Class 1 >8.0kW/m² FSV < 300; SDV < 500
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F1914 ASTM F970 (Modified) ISO 24343-1	≤0.005" ≤0.005" (750psi) ≤0.10mm
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Dimensional Stability	ISO 23999 (EN 434)	≤0.40%
Flexibility	ISO 24344 (EN 435) ASTM F137	(Method A) Pass 20mm ø 0.25" Pass
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

Sustainability	Standard	Result
BRE Green Guide		A+ ENP 415
GreenTag	LCA Rate Gold Plus	GreenRate level A
Generic EN 15804 EPD		Available
Recyclable		100%
Recycled Content		10%
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1		Certified
AgBB/ABG		Pass
Responsible Sourcing	BES 6001	Excellent

Acoustic Performance	Standard	Result
Impact Sound Reduction	ISO 10140-3	8dB

Maintenance Performance	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Hygiene	Standard	Result
Bacterial Resistance	ISO 846 Part C	Does not favour growth

POLYFLOR™ INTERNATIONAL

Australia
Polyflor Australia
Tel: 1800 777 425
Tel: +61 3 9215 4400
E-mail: sales@polyflor.com.au
www.polyflor.com.au

Canada
Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca
www.polyflor.ca

China
Polyflor North Asia Ltd
Tel: +(852) 2865 0101
E-mail: info@polyflor.com.hk
www.polyflor.com.hk

Colombia
Polyflor Ltd (LATAM Office)
Tel: +57 3142859005
E-mail: info@polyflor.com
www.polyflor.com

France
James Halstead France SAS
Tel: +33 (0)8 20 20 32 11
Email: info@jhfrance.fr
www.objectflor.de

Germany
objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de
www.objectflor.de

India
Polyflor India Pvt Ltd.
Tel: +91 22 4023 2485
Tel: +91 22 4023 2486
E-mail: info@polyflor.co.in
www.polyflor.com

Ireland
Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com
www.polyflor.com

Malaysia
Polyflor Martex
Tel: 1300 80 7788
E-mail: sales@polyflor.com.my
www.polyflor.com.my

Middle East
Polyflor Ltd
Tel: +971 50 406 8114
E-mail: info@polyflor.com
www.polyflor.com

New Zealand
Polyflor New Zealand Ltd.
Tel: 0800 765 335
Tel: +64 9 269 1111
E-mail: sales@polyflor.co.nz
www.polyflor.co.nz

Norway
Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no
www.polyflor.no

Spain
Polyflor Ltd
Tel: +34 619 949 054
E-mail: info@polyflor.com
www.polyflor.com

Sweden
Polyflor Nordic Sweden AB
Tel: +46 (0) 300 15820
E-mail: info@polyflor.se
www.polyflor.se

POLYFLOR™ UK

Polyflor Ltd. PO Box 3, Radcliffe New Road
Whitefield, Manchester, M45 7NR

UK Sales Direct: +44 (0)161 767 1122
Export Sales Direct: +44 (0)161 767 1913
Technical Support: +44 (0)161 767 1912
Reception: +44 (0)161 767 1111
Email: info@polyflor.com

For details on distribution for other countries,
as well as up to date product and technical
information, please visit www.polyflor.com

EXPONA® FLOW

DESIGN LED CONTINUOUS VINYL FLOORING ©



FLOW


DESIGN LED CONTINUOUS VINYL FLOORING ©



Use coordinating designs in harmony to create unique zones


DESIGNED TO MIX

9671 Eden Oak &
9677 Eden Oak Parquet

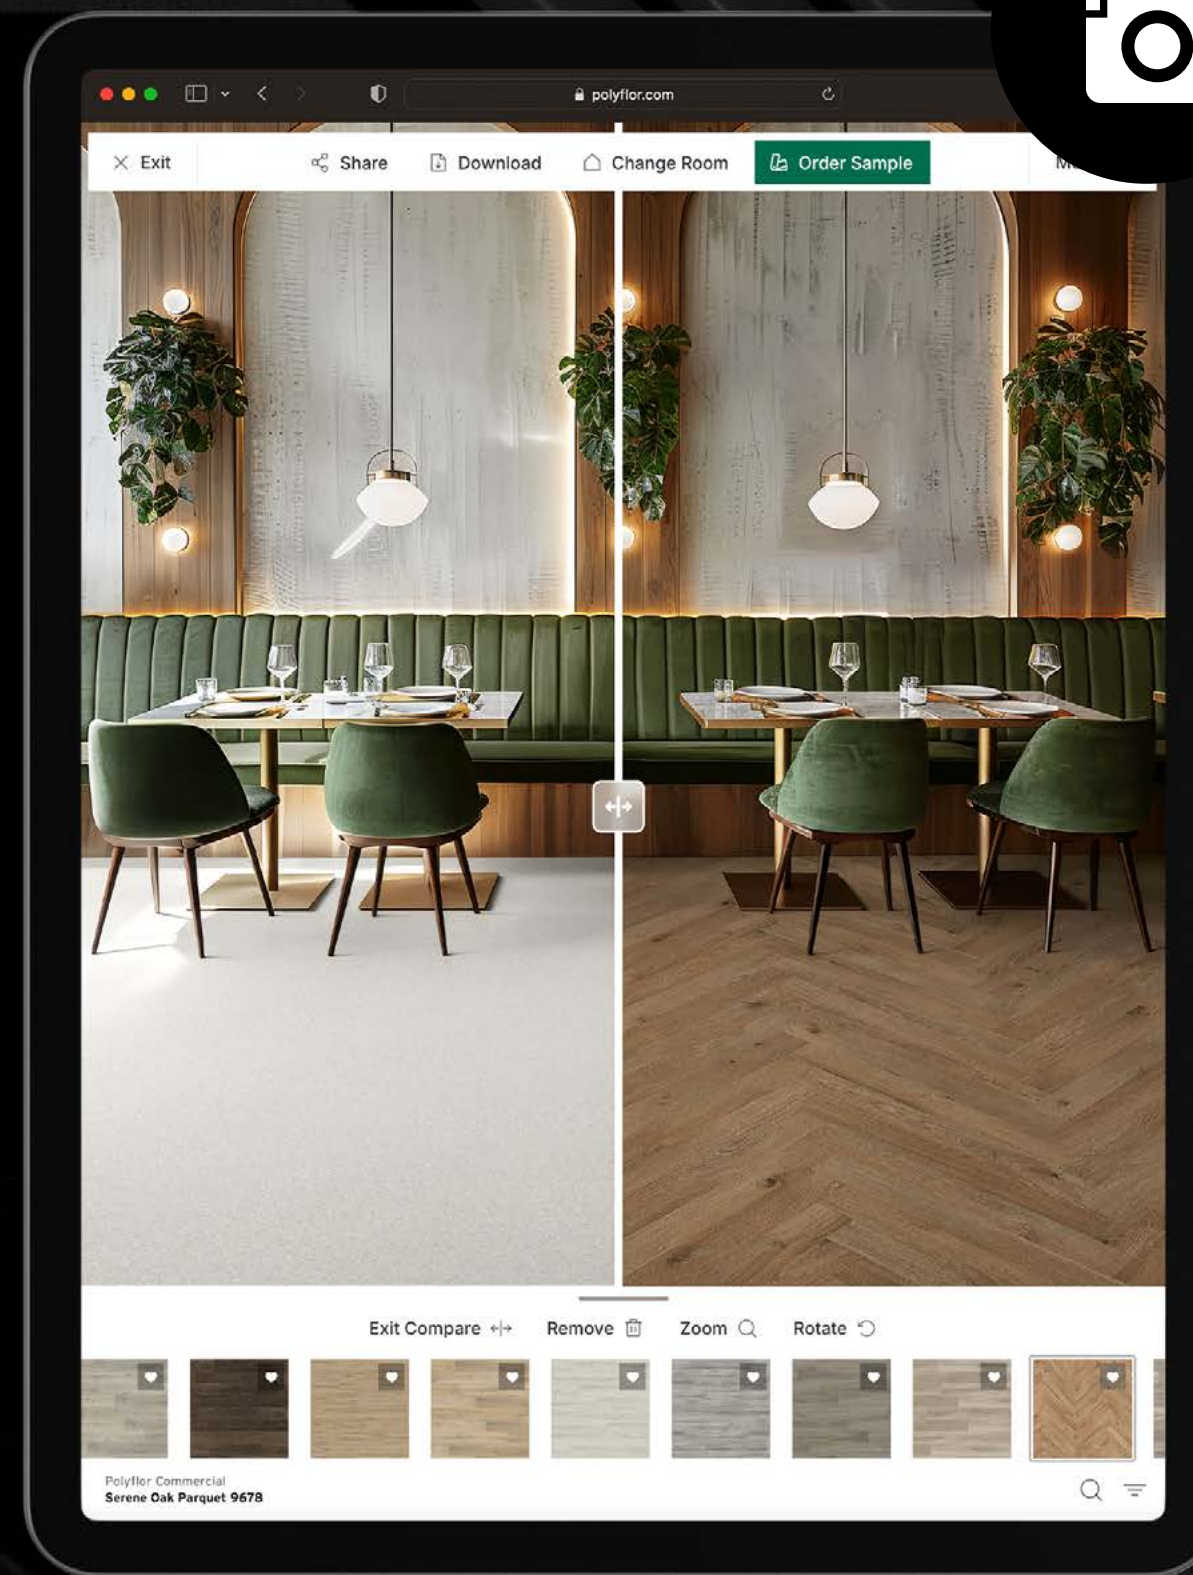

Explore and compare design options with our online visualiser

PICTURE INSTANTLY



DESIGN LED CONTINUOUS VINYL FLOORING

BASKET WEAVE



9681 Classic Basket Weave
Plank Size: 56 x 297mm & 120 x 120mm w/r 9681



9682 Antique Basket Weave
Plank Size: 56 x 297mm & 120 x 120mm w/r 9682



CHEVRON



9683 Grey Archer Oak
Plank Size: 100 x 333mm w/r 9683



9684 Tan Archer Oak
Plank Size: 100 x 333mm w/r 9684



HERRINGBONE



9677 Eden Oak Parquet
8955 Eden Oak Parquet (Silentflor 19dB)
Plank Size: 88 x 700mm w/r 9677



9678 Serene Oak Parquet
8956 Serene Oak Parquet (Silentflor 19dB)
Plank Size: 88 x 700mm w/r 9678



9679 Upland Oak Parquet
8957 Upland Oak Parquet (Silentflor 19dB)
Plank Size: 88 x 700mm w/r 9679



MATCHING PARQUET



9671 Eden Oak
8951 Eden Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9671



9673 Serene Oak
8953 Serene Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9673



9675 Upland Oak
8954 Upland Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9675



9676 Borough Oak
Plank Size: 200 x 1500mm w/r 9676



9672 Ridge Oak
8952 Ridge Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9672



9674 Bracken Oak
Plank Size: 200 x 1500mm w/r 9674



9826 Silver Oak
9951 Silver Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9826



9827 Smoked Oak
9963 Smoked Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9827



9833 Classic Limed Ash
9955 Classic Limed Ash (Silentflor 19dB)
Plank Size: 166 x 1500mm w/r 9833



9825 Sun Bleached Oak
9952 Sun Bleached Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9825



9820 Blond Oak
9956 Blond Oak (Silentflor 19dB)
Plank Size: 167 x 1500mm w/r 9820



9823 English Oak
9957 English Oak (Silentflor 19dB)
Plank Size: 200 x 1500mm w/r 9823



9832 Warm Limed Ash
9953 Warm Limed Ash (Silentflor 19dB)
Plank Size: 166 x 1500mm w/r 9832



9831 Roasted Limed Ash
9954 Roasted Limed Ash (Silentflor 19dB)
Plank Size: 166 x 1500mm w/r 9831




9821 Honey Oak
9959 Honey Oak (Silentflor 19dB)
Plank Size: 167 x 1500mm w/r 9821



9822 Toasted Oak
9960 Toasted Oak (Silentflor 19dB)
Plank Size: 167 x 1500mm w/r 9822

WOOD

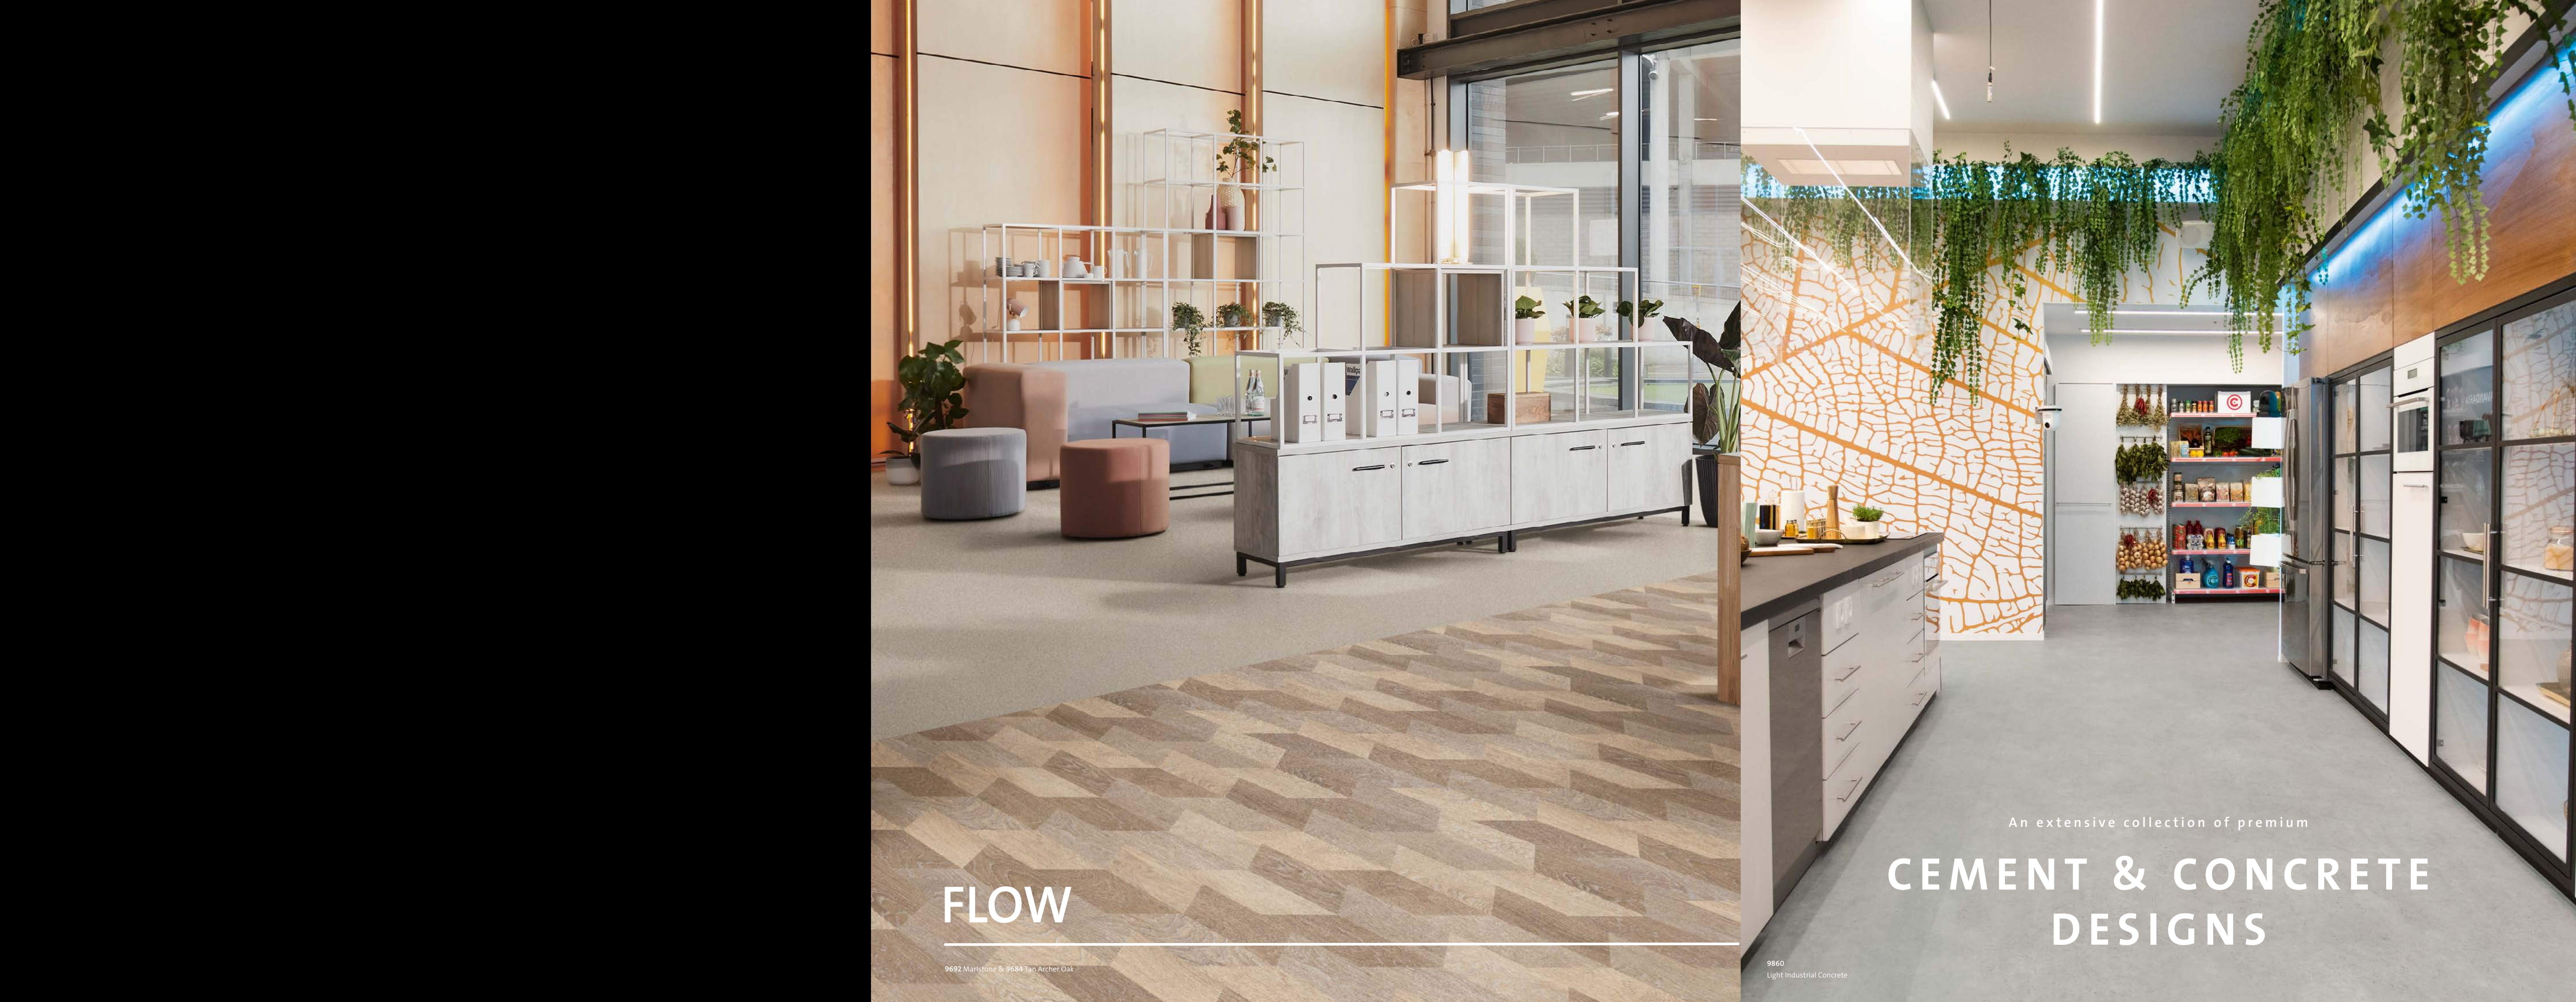

FLOW

9692 Marlstone & 9684 Tan Archer Oak

An extensive collection of premium
**CEMENT & CONCRETE
DESIGNS**

9860
Light Industrial Concrete

CONCRETE



9858 Light Grey Concrete
9965 Light Grey Concrete (Silentflor 19dB)

w/r 9858



9860 Light Industrial Concrete
9969 Light Industrial Concrete (Silentflor 19dB)

w/r 9860



9855 Warm Concrete
9967 Warm Concrete (Silentflor 19dB)

w/r 9855



9859 Dark Industrial Concrete
9970 Dark Industrial Concrete (Silentflor 19dB)

w/r 9859



9861 Copper Ornamental
9971 Copper Ornamental (Silentflor 19dB)

w/r 9861



9857 Dark Grey Concrete
9968 Dark Grey Concrete (Silentflor 19dB)


w/r 9857



9856 Cool Concrete
9966 Cool Concrete (Silentflor 19dB)

w/r 9856

TERRAZZO

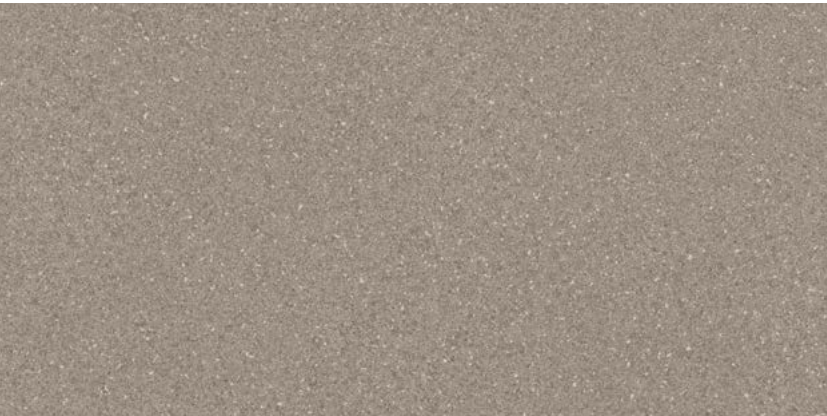

9691 Pebble
8961 Pebble (Silentflor 19dB)

w/r 9691



9693 Oyster
8962 Oyster (Silentflor 19dB)

w/r 9693



9689 Starlight

w/r 9689



9692 Maristone

w/r 9692

COSMOS



9842 Jet
9974 Jet (Silentflor 19dB)

w/r 9842




9845 Storm
9973 Storm (Silentflor 19dB)

w/r 9845



9841 Moleskin
9975 Moleskin (Silentflor 19dB)

w/r 9841

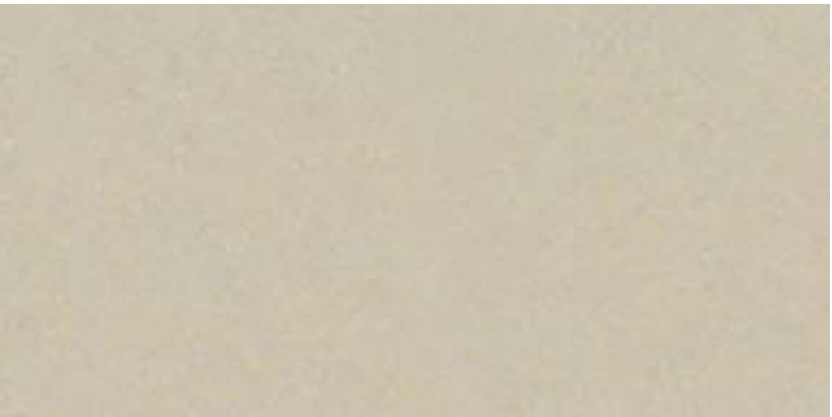

9840 Oatmeal

w/r 9840

CEMENT



9685 Dove Cement
8958 Dove Cement (Silentflor 19dB)

w/r 9685



9686 Pewter Cement
8959 Pewter Cement (Silentflor 19dB)

w/r 9686



9687 Chalk Cement

w/r 9687



9688 Sepia Cement
8960 Sepia Cement (Silentflor 19dB)

w/r 9688

INFINITY



9864 Autumn Rain
9986 Autumn Rain (Silentflor 19dB)

w/r 9864



9869 Honey Beige
9985 Honey Beige (Silentflor 19dB)

w/r 9869

